


## WALL FINISH PROFESSIONALS

TAIWAN • MALAYSIA • THAILAND




BRICK & STONE VENEER . TEXTURE PAINT . KASTPANEL . ECES . TEXTURE COATING . PEBBLE STONE COATING

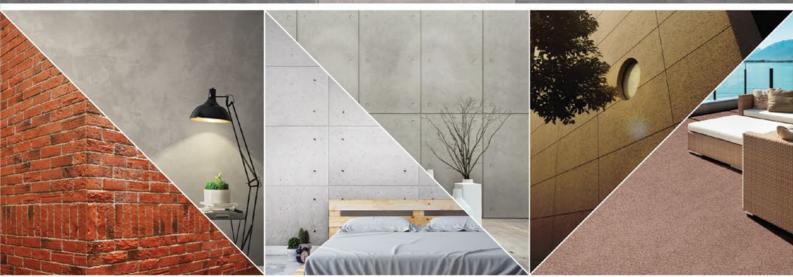

suzuka.com.my **o** f suzuka.group Hotline: +6012-359 5677







STRATO-E5-2104





# Strato. CEMENT TEXTURE

Create everlasting look with Strato® Cement Texture. Whether you are going for the industrial, scandinavian, contemporary or minimalistic style, the backdrop of the cement texture can complete the look.



Features

Crack Resistant



Low VOC & Odor



Formaldehyde & Lead Free

Anti-chalking & Efflorescence



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly



Applicable on Ceiling



Easy Maintenance




Easy to Touch Up



Matte Finishing

• INTERIOR USE ONLY For exterior options, please see MONOKRETE.

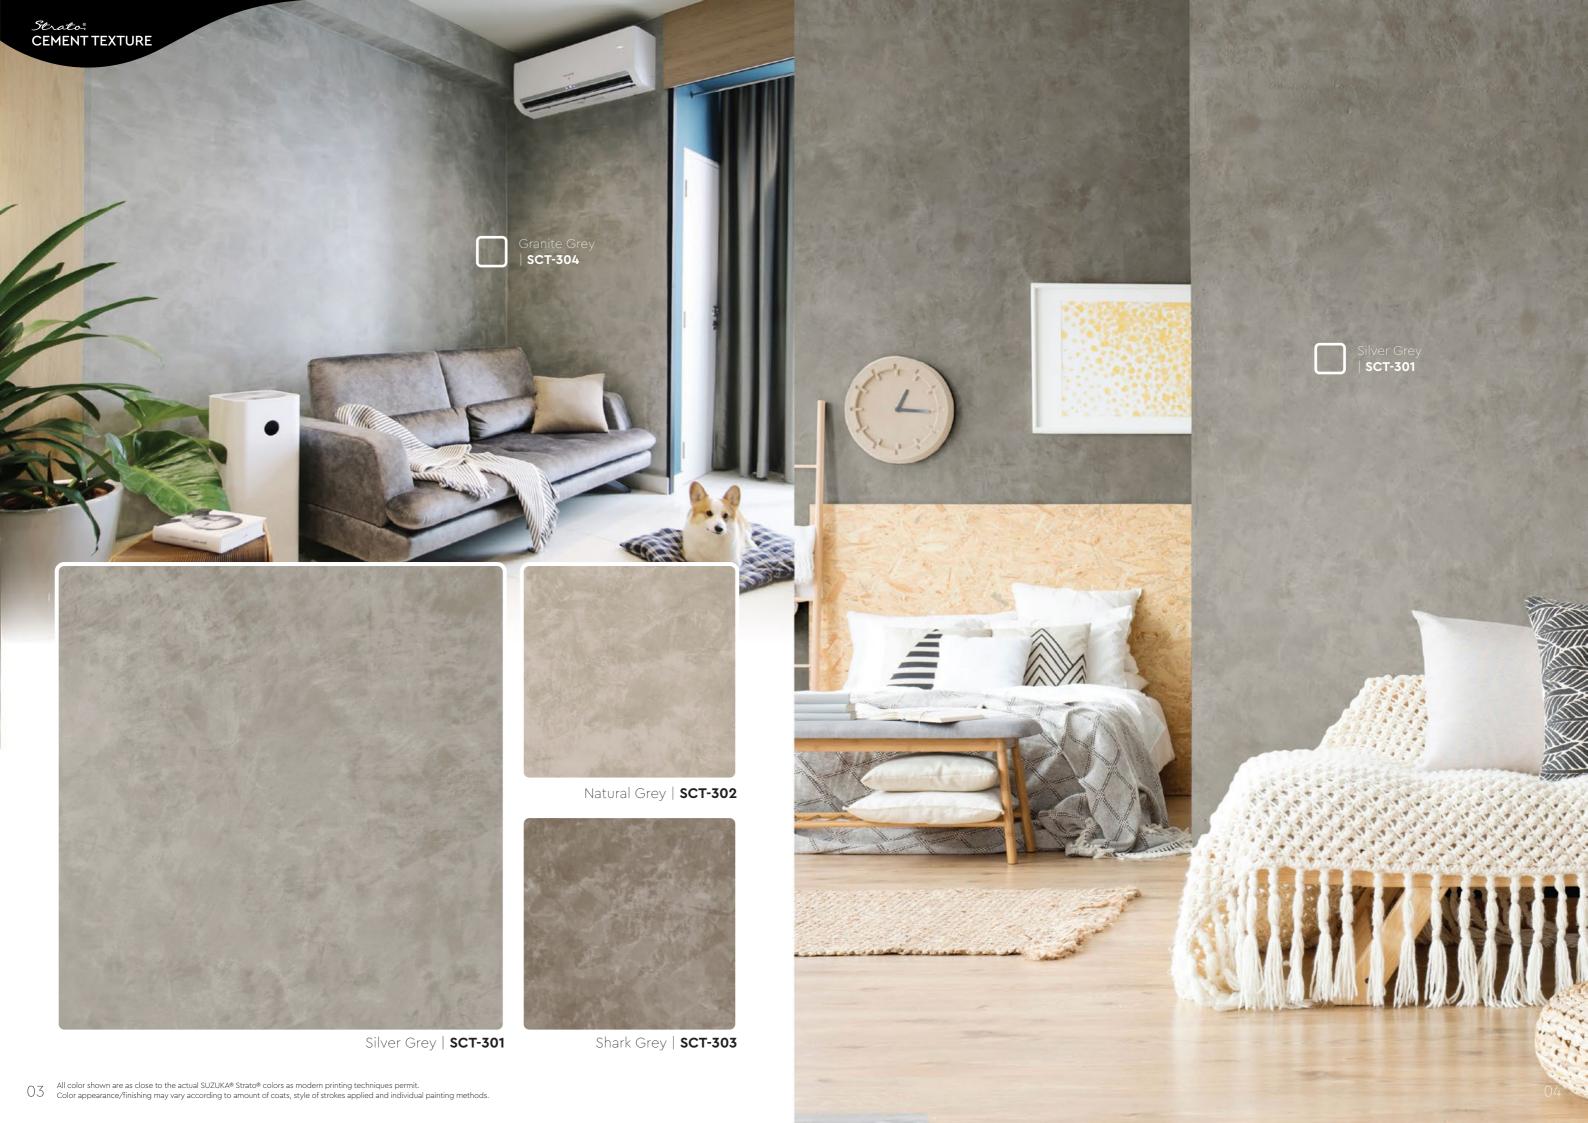



# **CEMENT TEXTURE** Ashes Grey SCT-309 **PACKING DATA:** 1L Primer | 1L Texture | 0.5L Topcoat (SR-Top 1) COVERAGE: 6-7 m<sup>2</sup> per set Ashes Grey | SCT-309 Misty Grey | SCT-310

#### **APPLICATION TECHNIQUE**





### Priner

Roll 2 layers of Strato\* Primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)



Sanding

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



### Texture Coat

Scrape Strato® Cement Texture Coat randomly to create pattern. Ensure the whole surface area is covered. Then apply second layer.

#### Tool: Stainless Steel Trowel

(use a larger trowel for a larger pattern a smaller trowel for smaller pattern)



### Sanding (OPTIONAL)

Sand the entire surface in circular motion to enhance the pattern.

Tool: 600 Grit Sand Paper



### opcoat

Apply SR-Top 1 on entire surface using a dry sponge in circular motions. **IMPORTANT:** Use a clean and dry sponge or cleaning cloth to wipe the excess topcoat before it dries to avoid the sponge marks.

Tool: Sponge / Cleaning Cloth

**IMPORTANT:** Color may vary on application technique & amount of material used.





Sand Paper (600 Grit)







# Strato: VELOURS

Rich velvety layers of color to enhance the interior space. Each color brings out a different mood & ambience, find a color that matches your personality.

• INTERIOR USE ONLY For exterior options, please see MONOKRETE.

## Features

Crack Resistant



Low VOC & Odor



Formaldehyde & Lead Free

Anti-chalking & Efflorescence



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly



Applicable on Ceiling



Easy Maintenance




Easy to Touch Up



Matte Finishing





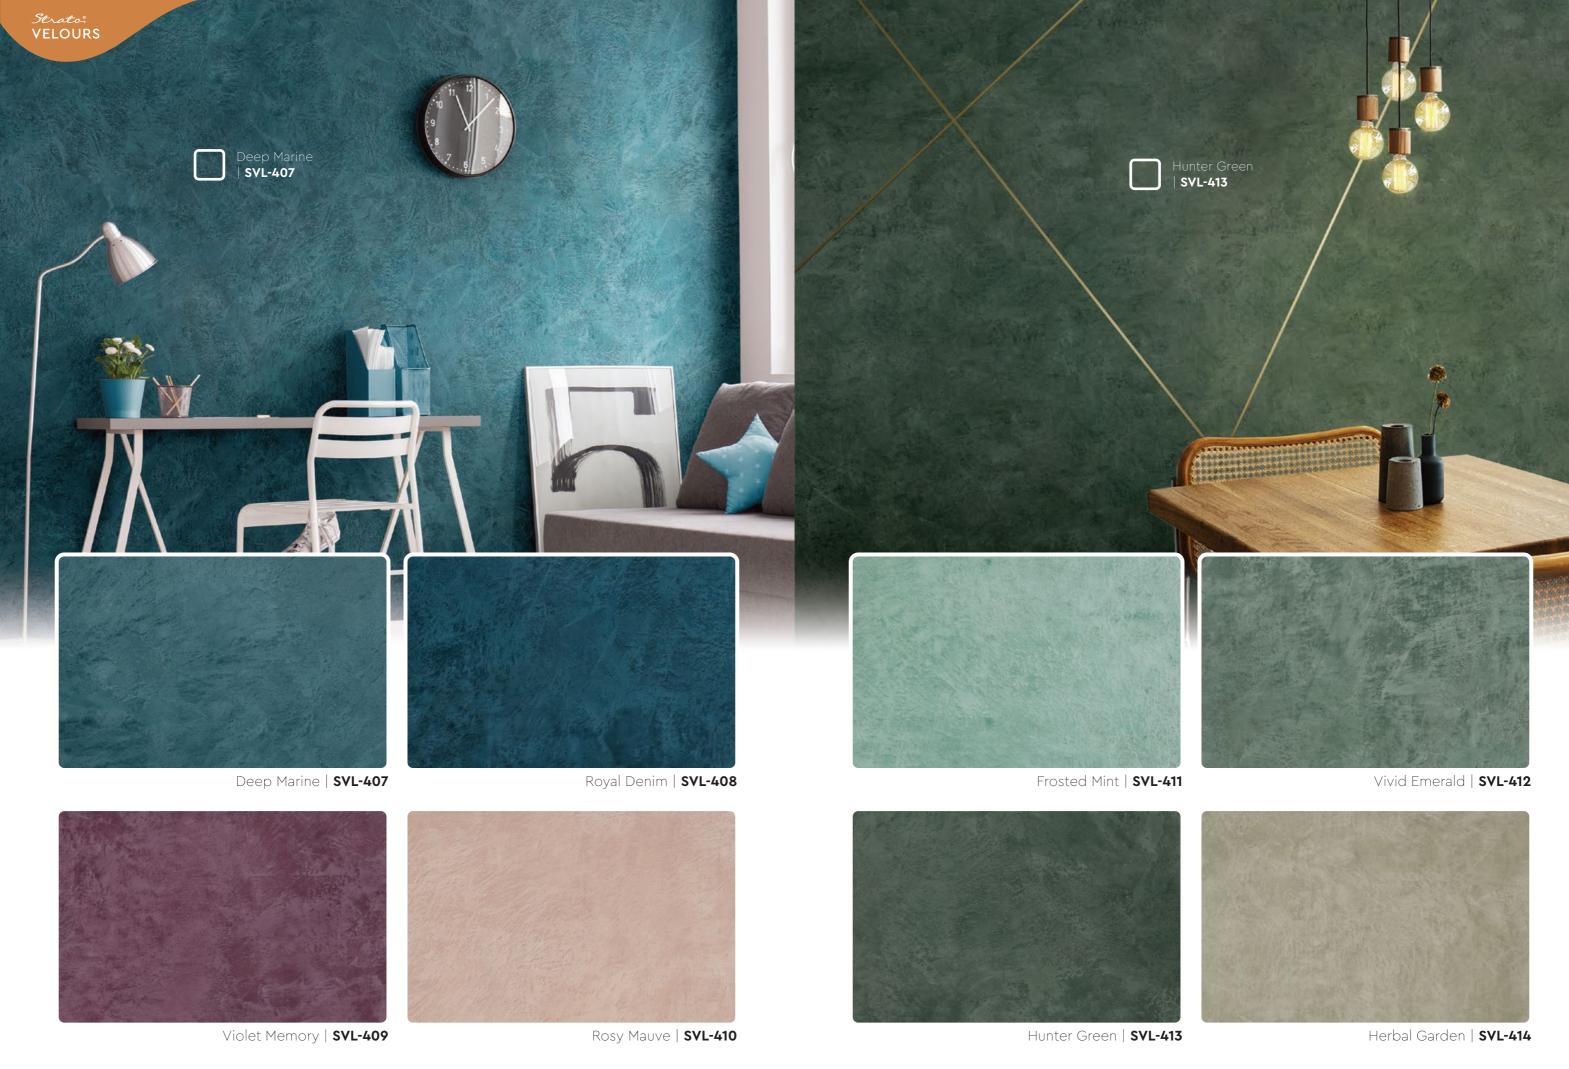

# VELOURS SVL-403 Flamingo Blush | **SVL-416 PACKING DATA:** 1L Primer | 1L Texture | 0.5L Topcoat (SR-Top 1)

Vanilla Cream | SVL-417

### APPLICATION TECHNIQUE





### Primer

Roll 2 layers of Strato\* Primer on the entire surface. Allow 30 minutes to dry between the layers.

(The primer can be diluted with maximum 5% of clean water)



### Sanding

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



### Texture Coat

Scrape Strato® Velours Texture Coat randomly to create pattern. Ensure the whole surface area is covered. Then apply second layer.

#### Tool: Stainless Steel Trowel

(use a larger trowel for a larger pattern a smaller trowel for smaller pattern)



### Sanding (OPTIONAL)

Sand the entire surface in circular motion to enhance the pattern.

Tool: 600 Grit Sand Paper



### opcoat

Apply SR-Top 1 on entire surface using a dry sponge in circular motions. **IMPORTANT:** Use a clean and dry sponge or cleaning cloth to wipe the excess topcoat before it dries to avoid the sponge marks.


Tool: Sponge / Cleaning Cloth

**IMPORTANT:** Color may vary on application technique & amount of material used.











COVERAGE: 6-7 m<sup>2</sup> per set

Lime Mist | SVL-415



### Strato: Cashmere

Strato® Cashmere embodies the pinnacle of elegance in textured coating. Achieved through smooth layering and delicate craftsmanship, the finished product gives a refined and royal appearance with a lingering hint of sophistication.

# Features

Low VOC & Odor



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly




Easy Maintenance



• INTERIOR ONLY



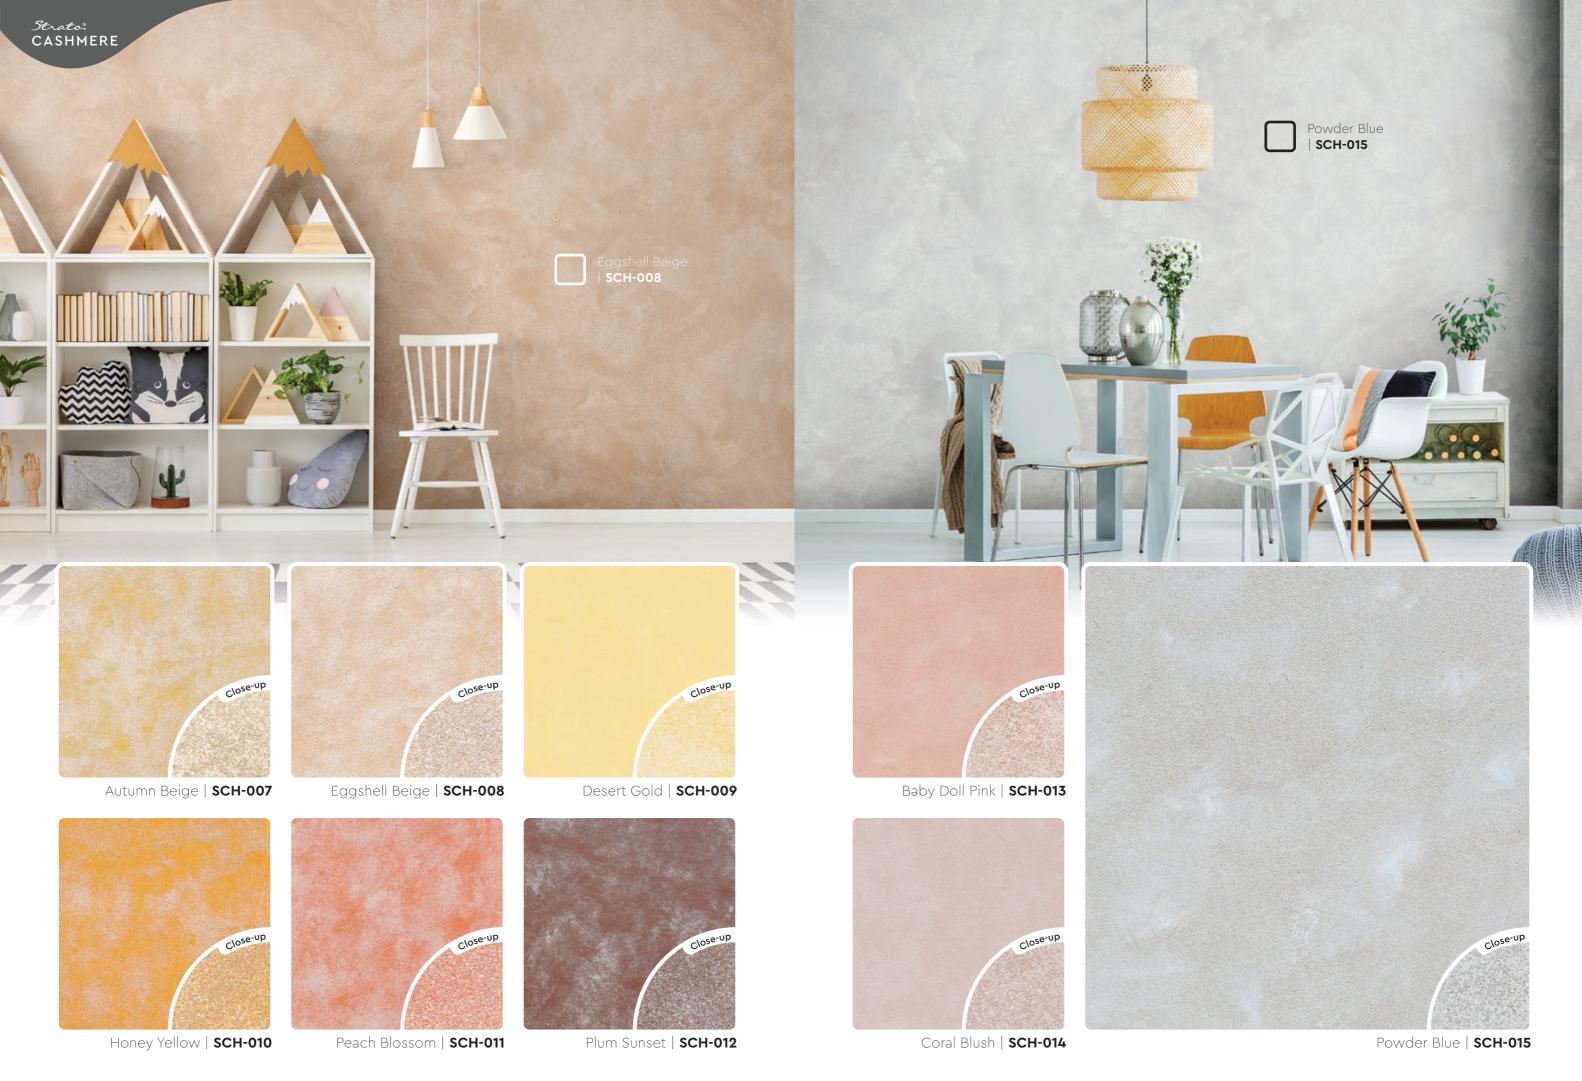

# CASHMERE SCH-019 Close-up

### APPLICATION TECHNIQUE





### Priner

Roll 2 layers of Strato\* Primer on the entire surface. Allow 30 minutes to dry between the layers.

#### Tool: Roller

(The primer can be diluted with maximum 5% of clean water)



### Texture Coat

cross patterns. Apply 1–2 layers. Ensure the whole surface area is covered.

Tool: Brush



### Flatten

Flatten the entire surface in circular motion to enhance the pattern.

Tool: Plastic Spatula



### Topcoat

Evenly roll SR-Top 3 on entire surface. Allow to dry for 1 hour.

Tool: Roller






Stardust Silver | **SCH-016** 

Close-up Peacock Blue | SCH-019 Olive Tree | SCH-020


Lace Blue | SCH-017



Ash Grey | SCH-018











## Strato: taffeta

A vibrant color layered in texture and dusted with a shimmering pearl effect crafts a bold and radiant feel onto the wall.

# Features

Low VOC & Odo



Formaldehyde & Lead Free



Green Choice, Water Based & Eco-friendly



Easy, Quick Application & DIY Friendly



Easy Maintenance



• INTERIOR ONLY

25



# TAFFETA Pale Lavender SRT-232 Blue Waves SRT-225 **PACKING DATA:** 1L Primer | 1L Texture | 0.5L Topcoat (SR-Top 2) COVERAGE: 4.5 m<sup>2</sup> per set Malted Mocha | SRT-231 Pale Lavender | SRT-232 Ocean Surface | SRT-233

#### **APPLICATION TECHNIQUE**





### Primer

Roll 2 layers of Strato\* Primer on the entire surface. Allow 30 minutes to dry between the layers.

#### Tool: Roller

(The primer can be diluted with maximum 5% of clean water)



### Sanding (OPTIONAL)

Sand the entire surface in circular motion to ensure the surface is smooth.

Tool: 600 Grit Sand Paper



### Texture Coat

Scrape Strato® Taffeta Texture Coat in a random criss cross pattern. 2–3 layers. Every layer requires 30 minutes to dry.

Tool: Steel Spatula



### Sanding

Sand the entire surface in circular motion to enhance the pattern

Tool: 600 Grit Sand Paper



### Topcoat

Scrape on Strato® Topcoat SR-Top 2 in a random criss cross overlapping patterns. Allow 1 hour to dry

Tool: Steel Spatula

Taffeta has a **shimmering** pearl effect topcoat. For a matte finishing, please request SR-Top 1.

#### Tools:





